

ATTENTION:

OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DEVICES

Removal/Installation of Touchscreen - FORCE Upright Fusion/Fun Zone

Touchscreen Removal

(Fun Zone games and Fusion games with electronic boxes)

1. Turn off and unplug the game.
2. Unlock and open the bezel.
3. Remove the 6 thumbnuts fastening the bezel to the game (see Figure 1) and remove the bezel.
4. Remove the cable clamp securing the touchscreen cable and the touchscreen power harness, then remove the screws fastening the touchscreen controller (see Figure 1) to the game and disconnect the cable from the back of the controller. Locate and disconnect the Molex connector (orange and gray wires) running from the touchscreen controller cable to the main power harness (you will need to remove the wires from the cable clamps keeping the harnesses in place), and also disconnect the ground screw. See Figure 1.
5. Use dental floss to carefully cut the foam tape holding the touchscreen to the monitor until you are able to completely remove the screen. Once the touchscreen is completely free from the monitor, remove any residual foam tape from the monitor with denatured alcohol.

Touchscreen Installation

(Fun Zone games and Fusion games with electronic boxes)

1. Clean the glass on the new LCD monitor with the supplied alcohol wipe, then cut pieces of the supplied 1/2" foam tape long enough to cover each edge of the monitor without overlapping. After the tape is in place on the monitor, peel off the backing. Carefully place the touchscreen over the monitor in the same manner it was attached to the old monitor, making sure the screen is properly and evenly aligned over the glass. Clean the front of the touchscreen with the supplied alcohol wipe once it is in place.
2. Connect the touchscreen cable in the back of the controller and secure the controller with the existing hardware. Also connect the Molex connector (orange and gray wires) to the main power harness (after routing the wires through the cable clamps) and attach the ground screw. See Figure 1.
3. Reinstall the bezel on the game and fasten it with the 6 thumbnuts.
4. Plug in and turn on the game.
5. When the game is finished booting, press the CALIBRATE button.
6. Close and lock the bezel, then calibrate the touchscreen.

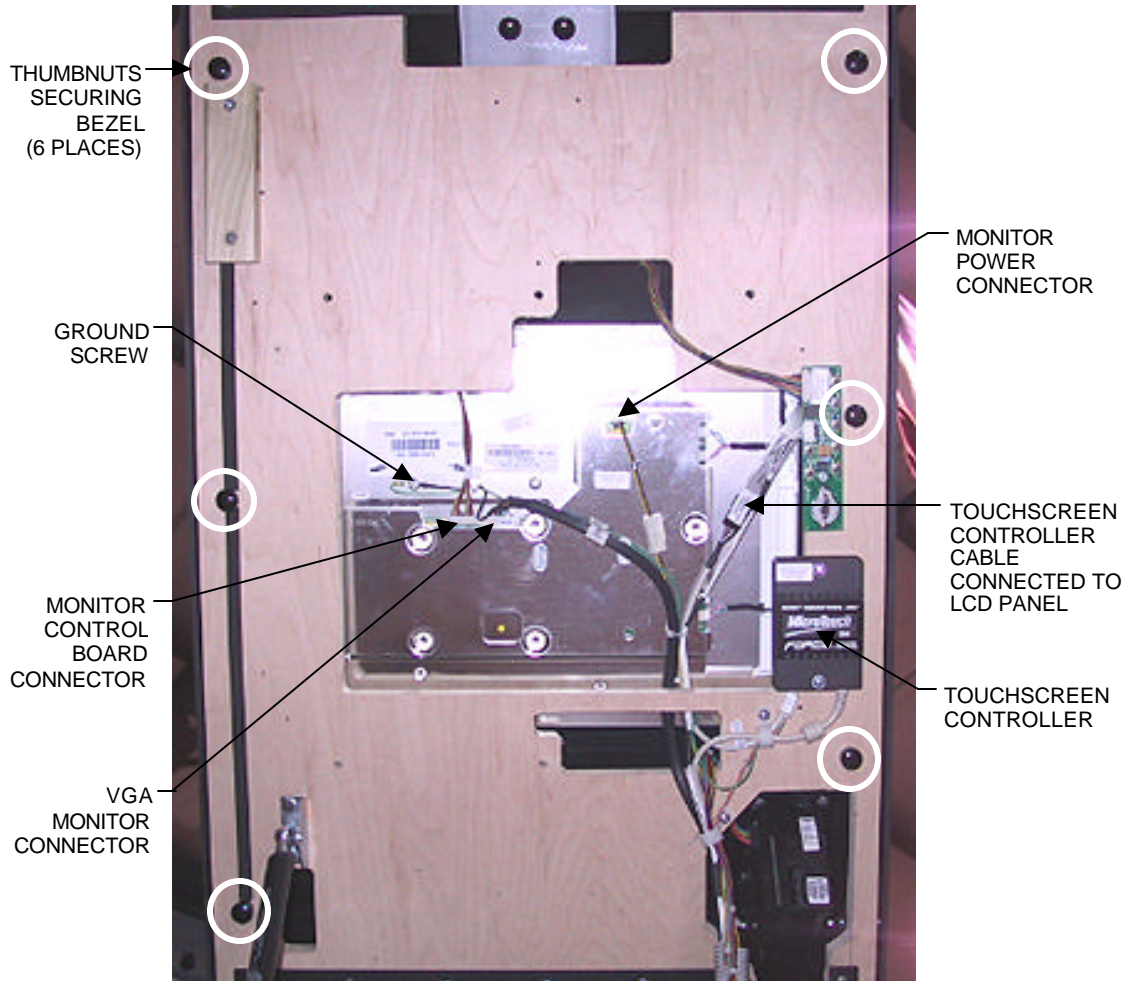


FIGURE 1 - UNDERSIDE OF BEZEL