

ATTENTION:

OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DEVICES

Removal/Installation of Major Assemblies - eVo/eVo Wallette/Elite Edge Ion

Hard Drive Removal

1. If you are connected to TournaMAXX or TournaCHAMP, you must perform an **Update From Server** before removing the hard drive so that no information is deleted.
2. Turn off and unplug the game.
3. Unlock and open the CPU section.
4. Remove the 4 screws and washers securing the hard drive to the hard drive mounting plate. See Figure 1.
5. Remove the hard drive assembly and disconnect the hard drive ribbon cable running to the motherboard.

Hard Drive Installation

1. Connect the hard drive ribbon cable to the hard drive according to Figure 2. Note that 4 pins on the hard drive are set off and will remain unconnected. Make certain that the red stripe on the ribbon cable (indicating pin-1 position) is inserted facing the unconnected pins.
2. Align the new hard drive in the hard drive mounting plate and secure it in place with the 4 existing screws and washers. See Figure 1.
3. Close and lock the CPU section.
4. Plug in and turn on the game.

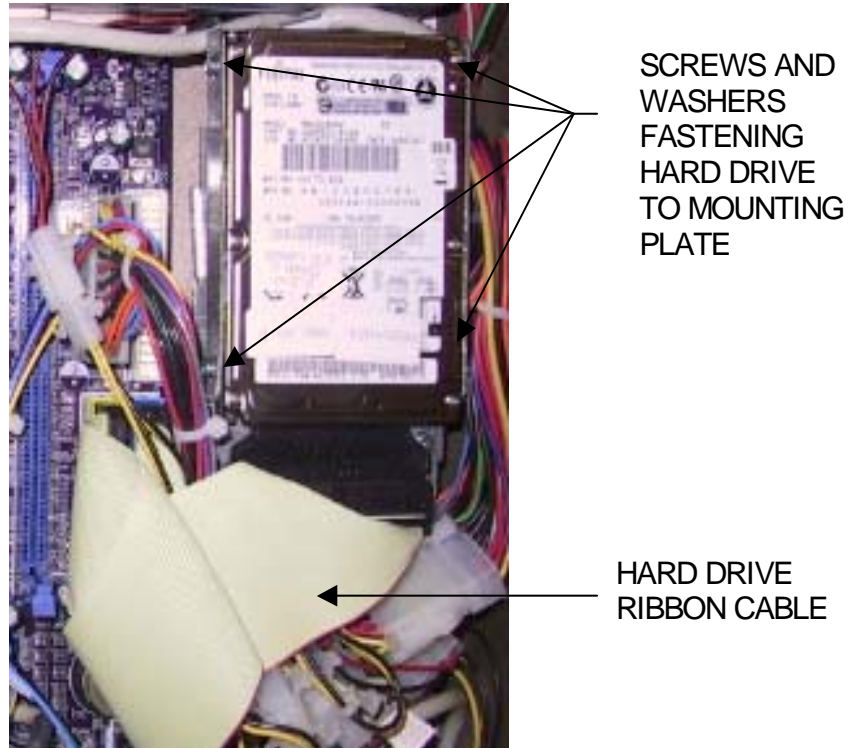


FIGURE 1 - HARD DRIVE ASSEMBLY



FIGURE 2 - CIRCUIT-BOARD SIDE OF HARD DRIVE