

## **ATTENTION:**

OBSERVE PRECAUTIONS FOR HANDLING ESD-SENSITIVE DEVICES

### **Removal/Installation of Major Assemblies - Ion Rx**

#### **Bill Acceptor Removal**

1. Turn off and unplug the game.
2. Unlock the game, then open it by pulling the rear of the top bezel forward.
3. Pull out the bill acceptor magazine by pushing in the blue button at the bottom of the acceptor and then sliding the magazine down and out. Remove the four screws securing the bill acceptor to the bill acceptor bracket (see Figure 1).

*Note: You may have to remove the bracket above the bill acceptor to gain access to the top screws that secure the bill acceptor. To do so, simply remove the 2 screws on the bracket and move the bracket out of the way. You should now have easier access to the bill acceptor's top screws.*

4. Remove the bill acceptor from the unit and disconnect the bill acceptor power cable that runs into the side of the bill acceptor (see Figure 1).

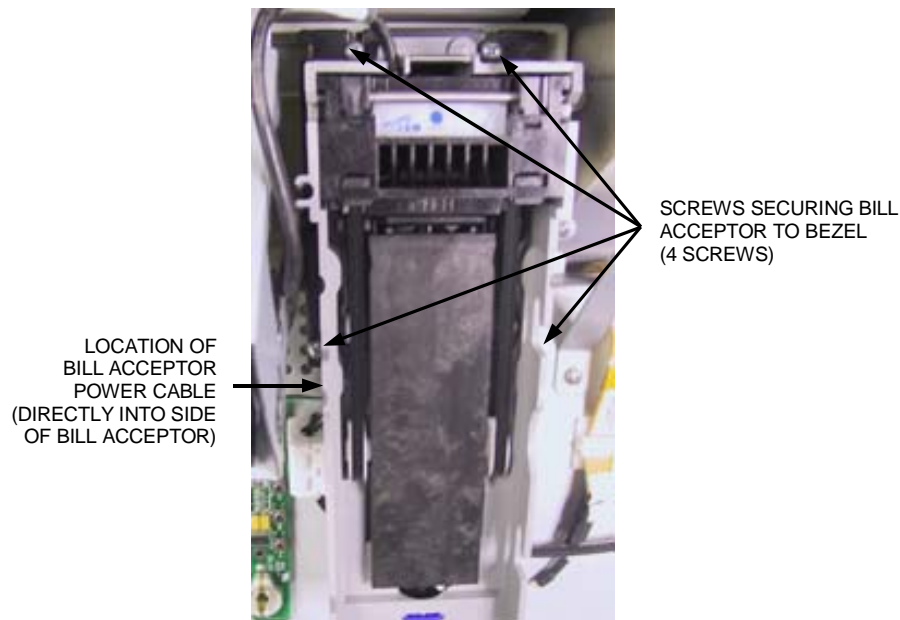


FIGURE 1 - BILL ACCEPTOR WITH MAGAZINE REMOVED

#### **Bill Acceptor Installation**

1. Connect the existing bill acceptor power cable to the bill acceptor (see Figure 1).
2. Place the bill acceptor into place in the unit and secure it with the same four screws (see Figure 1). If you removed the bracket above the bill acceptor, resecure it to the unit. Slide the bill acceptor magazine back on to the bill acceptor.
3. Press the button on the monitor support arm to release the arm, then close and lock the top bezel.
4. Plug in and turn on the game.

### **Troubleshooting Information - Removal/Installation of Major Assemblies - Ion Rx**