

## **ATTENTION:**

OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DEVICES

### **Removal/Installation of Major Assemblies - Money Shoot**

#### **Power Supply Removal**

1. Turn off and unplug the game.
2. Unlock and open the bottom door.
3. Remove the 4 screws securing the electronics box cover. See Figure 1. Carefully remove the cover.
4. Remove the 4 shoulder washers (2 on the left interior wall and 2 on the floor of the electronics box) securing the power supply assembly to the game. See Figure 2.
5. Disconnect all connections to the main power supply harness.
6. Remove the power supply.

#### **Power Supply Installation**

1. **NOTE: Before securing the power supply assembly, make sure the ground wire is secured around the left rear pem stud.** Install the new power supply assembly in the game in the same manner as the old power supply. Fasten with the existing hardware. See Figure 2.
2. Reconnect all connections to the main power supply harness.
3. Plug the IEC connector into the new power supply.
4. Replace the electronics box cover and fasten it with the 4 screws. See Figure 1.
5. Close and lock the bottom door.
6. Plug in and turn on the game.

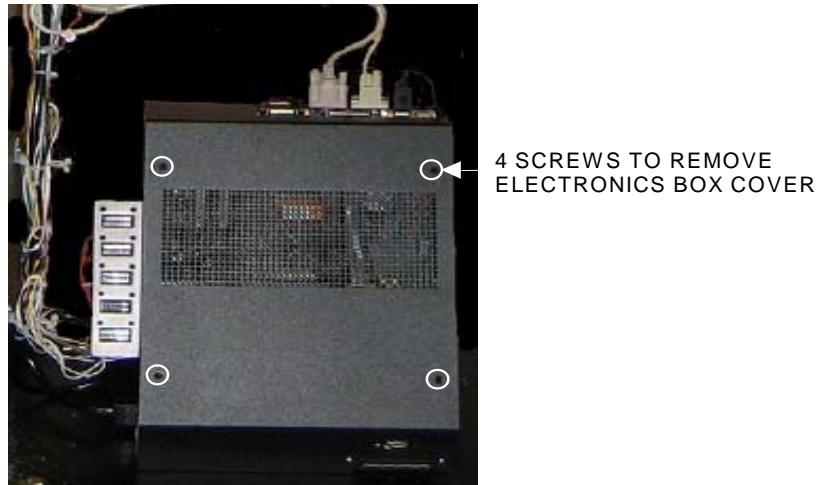


FIGURE 1 - CLOSED ELECTRONICS BOX - LOCATED IN BOTTOM OF MONEY SHOOT CABINET

4 SHOULDER  
WASHERS  
SECURING  
POWER SUPPLY  
ASSEMBLY



FIGURE 2 - POWER SUPPLY AND MOUNTING BRACKET